



The frequency scaling has been set so at 1Hz, the input and output should be equal in magnitude. Notice that the input input needs to be sample before applying to the digital integrator.

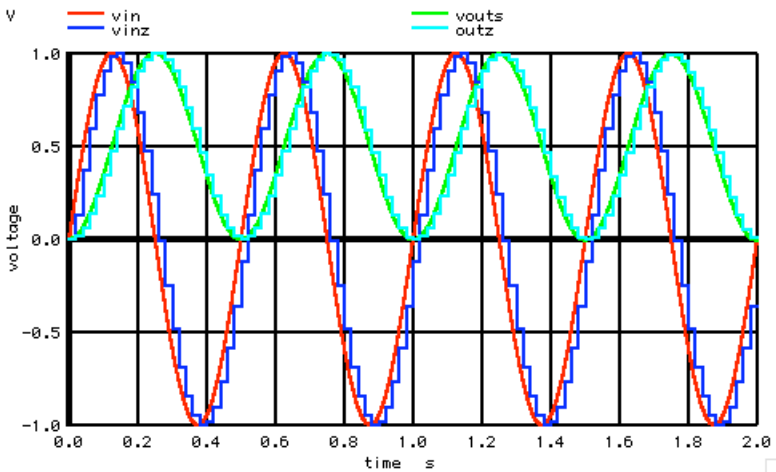

Changing the input frequency to 2Hz should have the same effect on both the "1/s" block and the "1/z" block.

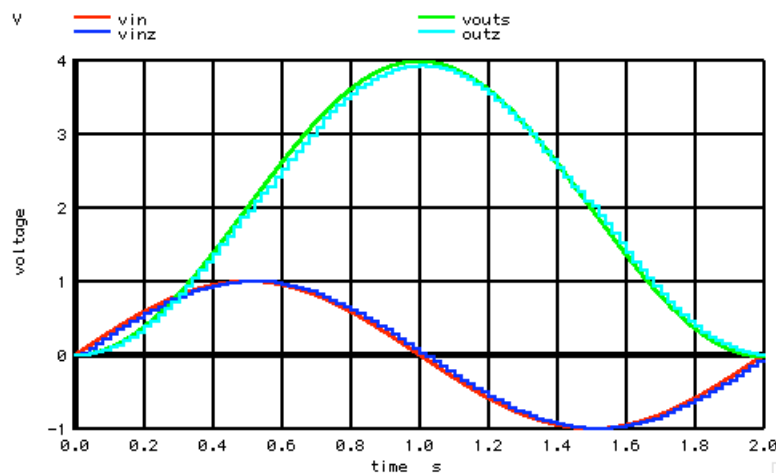

And Changing the input frequency to 0.5Hz should have the same effect.





6.7.11\_10.53AM  
dsauersanjose@aol.com  
Don Sauer